


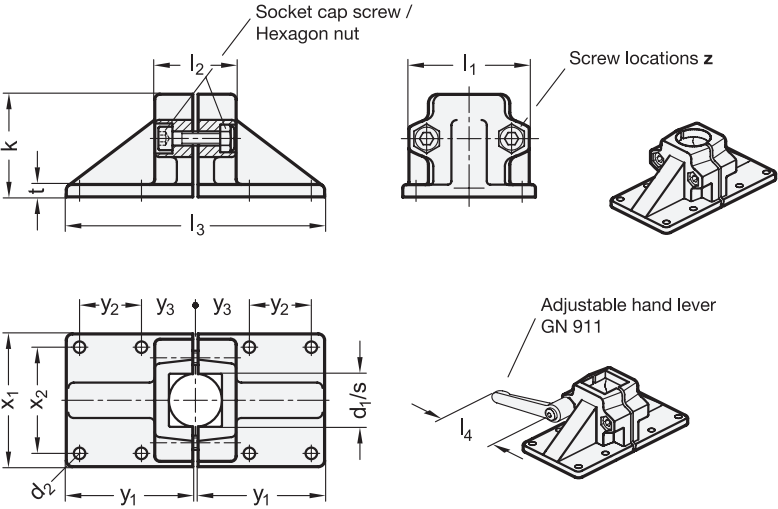

- 2 Identification no.**
- 2 With 2 stainless steel socket cap screws DIN 912

1 d₁ Bore	1 s Square	d₂	k Clamping length	l₁	l₂	l₃	t	x₁	x₂	y₁	y₂	y₃	z Screw locations	Accessory Recom. hand lever GN 911 for z l₄	
B 20	V 20	7	58	69	46	146	7	75	60	72	35	30	M8-35	63	78
B 25	V 25	7	58	69	46	146	7	75	60	72	35	30	M8-35	63	78
B 30	V 30	7	58	69	46	146	7	75	60	72	35	30	M8-35	63	78
B 40	V 40	11	91	98	70	219	14	115	90	108	50	45	M10-60	78	92
B 42	-	11	91	98	70	219	14	115	90	108	50	45	M10-60	78	92
B 45	V 45	11	91	98	70	219	14	115	90	108	50	45	M10-60	78	92
B 48	-	11	91	98	70	219	14	115	90	108	50	45	M10-60	78	92
B 50	V 50	11	91	98	70	219	14	115	90	108	50	45	M10-60	78	92

Specification

3

- Aluminum
 - Powder coated
 - Black, RAL 9005, textured finish **● SW**
 - Plain, matte shot-blasted **○ BL**
- Socket cap screws DIN 912
 - Stainless steel AISI 304
- Hexagon nuts DIN 985
 - Stainless steel AISI 304
 - Self-locking via polyamide ring
- Stainless Steel Characteristics → Page QVX
- RoHS

Accessory

- Adjustable Hand Levers GN 911 → Page QVX

Information

The clamping bore of wide base plate connector clamps GN 167 is not machined and designed for construction tubes GN 990 or DIN 2391, DIN 2395 and DIN 2462.

The versions with square bores are also suitable for use with **profile systems**.

At the screw locations **z** the socket cap screws reduce the bore cross-section for clamping.

For clamping without tools, the socket cap screws can be replaced by the adjustable hand levers GN 911 listed in the table as accessories.

see also...

- Product Family Standard Parts for Profile Systems → Page QVX
- Construction Tubes GN 990 → Page QVX

How to order	1 s (d ₁)
GN 167-V30-2-SW	2 Identification no.
	3 Finish