

Revolving handles



- **Material**

High resilience polypropylene based (PP) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

- **Colour**

Black, matte finish.

- **Assembly**

AISI 303 stainless steel shank, hexagonal socket at threaded end.

Features and applications

AISI 303 stainless steel, thanks to its high resistance to corrosion, allows the application of these handles on machines and equipment in those sectors where laws or particular hygienic, climatic and environmental factors make it mandatory to use corrosion resistant materials.



Revolving handles

- **Material**

Steel.

- **Colour**

RAL 9005 black colour, matte finish, epoxy resin coating.

- **Assembly**


Zinc-plated steel shank, hexagon socket at threaded end.




5

396

Fixed, revolving, fold-away handles

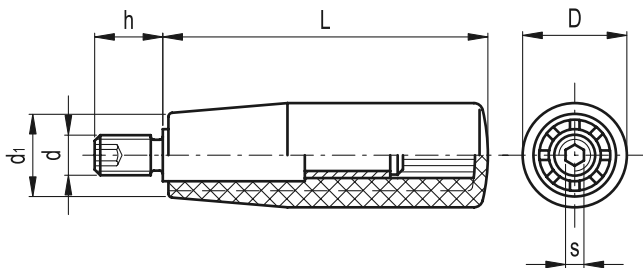

Standard Elements		Main dimensions			Threaded shank			⚖
Code	Description	L	D	d1	d 6g	h	s	g
24925	I.601/40+x-M6-INOX	40	18	15	M6	13	3	25
24935	I.601/50+x-M6-INOX	50	21	17	M6	13	3	35
24955	I.601/65+x-M8-INOX	65	23	19	M8	15	4	68
24965	I.601/80+x-M10-INOX	80	26	21	M10	17	5	78
24975	I.601/90+x-M10-INOX	90	28	22	M10	17	5	85

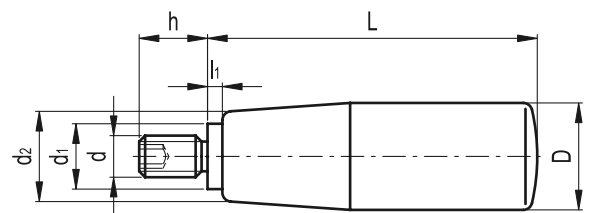

Standard Elements	Main dimensions					Threaded shank		⚖
Description	D	L	d1	d2	l1	d	h	g
GN 598-ST-18-M6	18	42.5	10	15	2.5	M6	12	71
GN 598-ST-21-M6	21	52.5	10	17	2.5	M6	13	120
GN 598-ST-21-M8	21	52.5	10	17	2.5	M8	13	122
GN 598-ST-23-M8	23	67.5	13	19	2.5	M8	14	188
GN 598-ST-23-M10	23	67.5	13	19	2.5	M10	14	190
GN 598-ST-26-M8	26	82.5	13	21	2.5	M8	16	295
GN 598-ST-26-M10	26	82.5	13	21	2.5	M10	16	298
GN 598-ST-28-M10	28	92.5	13	22	2.5	M10	16	390
GN 598-ST-31-M12	31	104.5	14	25	2.5	M12	20	563

