


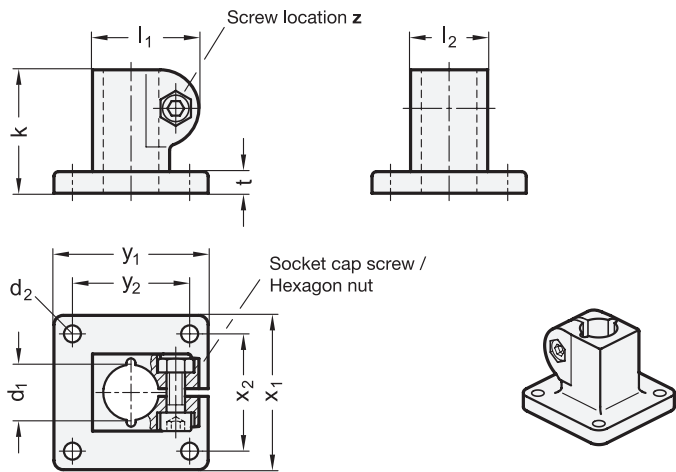

2 Identification no.
2 With stainless steel
socket cap screw DIN 912

d ₁ Bore Aluminum	Stainless Steel	d ₂	k Clamping length	l ₁	l ₂	t	x ₁	x ₂	y ₁	y ₂	z Screw location
B 10	-	5,5	40	34,5	25	7	50	38	50	38	M6-20
B 12	B 12	5,5	40	34,5	25	7	50	38	50	38	M6-20
B 14	B 14	5,5	40	34,5	25	7	50	38	50	38	M6-20
B 15	B 15	5,5	40	34,5	25	7	50	38	50	38	M6-20
B 16	B 16	5,5	40	34,5	25	7	50	38	50	38	M6-20
B 18	B 18	5,5	40	34,5	25	7	50	38	50	38	M6-20
-	B 20	5,5	40	34,5	25	7	50	38	50	38	M6-20

Specification

- Aluminum
 - Powder coated
 - Black, RAL 9005, textured finish **SW**
 - Plain, matte shot-blasted **BL**
- Stainless steel AISI CF-8 **NI**
 - Matte shot-blasted
- Socket cap screws DIN 912
 - Stainless steel AISI 304
- Hexagon nuts DIN 985
 - Stainless steel AISI 304
 - Self-locking via polyamide ring
- Stainless Steel Characteristics → Page QVX
- RoHS

Information

The clamping bore of base plate connector clamps GN 162 is mechanically machined and designed for construction tubes GN 990 or DIN 2391, DIN 2395 and DIN 2462.

At the screw location **z** the socket cap screw reduces the bore cross-section for clamping.

see also...

- Base Plate Mounting Clamps GN 473 (Aluminium) → Page QVX
- Foot Clamp Mountings GN 175 (Plastic) → Page QVX
- Construction Tubes GN 990 → Page QVX
- Base Plate Linear Actuator Connectors GN 162.1 → Page QVX

How to order (Aluminum) GN 162-B14-2-SW	1 d ₁
	2 Identification no.
	3 Finish
How to order (Stainless Steel) GN 162-B12-2-NI	1 d ₁
	2 Identification no.
	3 Material